


MARTIN® Single Timer Controller

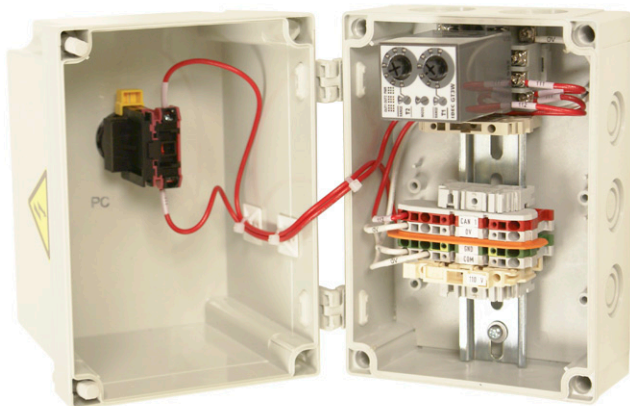

The [MARTIN® Single Timer Controller](#) controls one solenoid for air cannon operations or pneumatic vibration applications. The timer is a repeat cycle with adjustable ON time and OFF time.

BENEFITS

- **Precision Flow Management**
Provides automatic cycle function for pneumatic solenoid.
- **Flexible**
Cycle can be manually operated from outside the enclosure. ON/OFF times can be adjusted from .1 seconds to 6 hours.
- **Indoor or Outdoor Use**
Standard NEMA 4X Enclosure is water-tight/dust-tight/ corrosion-resistant.
- **Easy to Install**
Connect to your electric supply, wire the solenoids, and set ON/OFF times. Also available with 20 Amp output relay.
- **Simple to Use**
No programming required, just set times for T1 and T2 (ON/OFF) timers.

ORDER INFORMATION

MARTIN® Single Timer Controller	P/N 38902
MARTIN® Single Timer Controller with 20 Amp output relay	P/N 38902-20

TIME RANGES

Time Range Selector	Scale	Time Range
1S	0-1	0.1 sec to 1 sec
10S		0.3 sec to 10 sec
10M		15 sec to 10 min
1S	0-6	0.1 sec to 6 sec
10S		1.3 sec to 60 sec
1M		7.5 sec to 1 min
10M		15 sec to 60 min
1H		7.5 min to 6 hours

SPECIFICATIONS

Electrical Requirements	120/240 VAC, Single Phase 50/60 Hz
Power Consumption	120V 5 Amps 240V 3 Amps
Output	Single
Service Temperature Range	14° to 122°F (-10° to 50°C)
Timing Range	.1 second to 6 hours



Martin Engineering USA
One Martin Place
Neponset, IL 61345-9766 USA
800 544 2947 or 309 852 2384
Fax 800 814 1553
www.martin-eng.com

Subject to change without prior notice.
Quality Management System Certified by DNV - ISO 9001

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO 9001:2008 ==